

Current Sensor 20 mm Toroid With Primary

POWER MAGNETICS

FALCO
electronics


(CST020 PRI 50/60 Hz) Series



MAX. DIM :
L = 23.65 mm
W = 25.40 mm
H = 25.40 mm

- For application at 50/60 Hz.
- Rated current 60 Amps
- Single primary built-in.

MECHANICAL SPECIFICATIONS

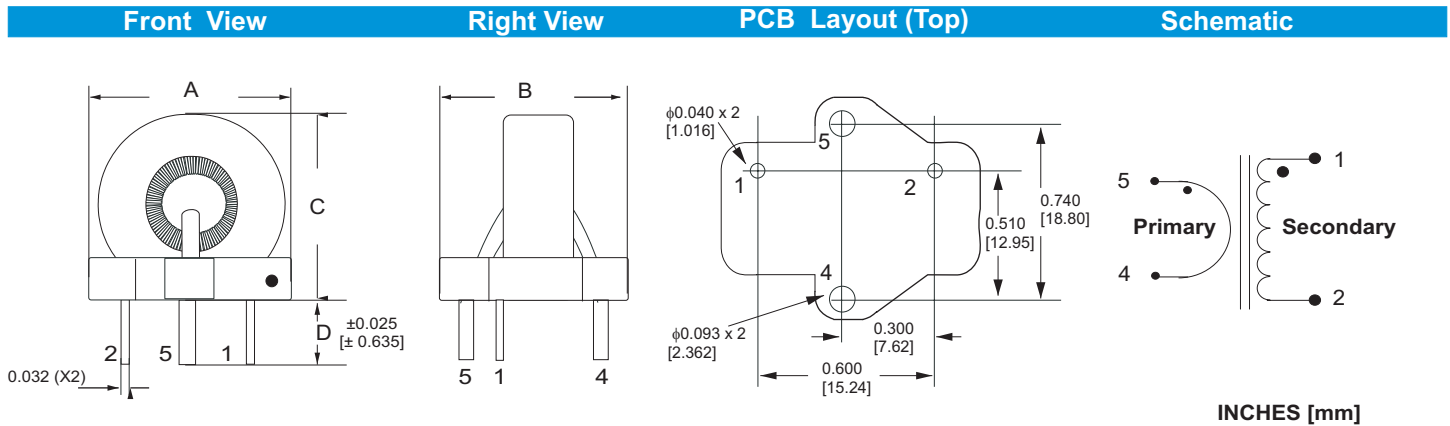

ELECTRICAL SPECIFICATIONS

RoHS PART NUMBER	V/A	TOL.	Turns Ratio	I _{rms} max. (Amps.)	DCR (Ω) ¹ max.	A max. in / mm	B max. in / mm	C max. in / mm	D nom. in / mm	RB (Ω)
T75010	0.100	±2%	1000:1	60.00	46.20	0.931 / 23.65	1.000 / 25.40	1.000 / 25.40	0.200 / 5.08	100

1. DCR tested at Ta= 25°C.



RoHS COMPLIANT PRODUCT